

iR Media Connector

Cost-saving, No installation Solution for Audio Integration

The iRMC Media Connector is designed to integrate and amplify all classroom multimedia audio sources with ease.

Computers, DVD players, MP3 players, etc. can be connected to the compact device which wirelessly transmits the signal to a Lightspeed classroom audio system for crystal clear amplification.



Specifications


Description: wireless infrared audio transmitter.

Carrier Frequencies	2.54 MHz and 3.7 MHz
Frequency Response	80 Hz to 10 kHz \pm 3 dB
Signal-to-noise Ratio	>70 dB
Audio Distortion	<1%
Audio Inputs	Three (3) 3.5mm stereo jack
DC Power Input	5 V / 1.0 Amp, 0.65mm coaxial barrel DC power jack
USB Power	5 V mini-B USB connector
Mounting	wall or table-top
Dimensions (L x W x H)	4.25" x 3.375" x 4"

Features

- Wireless transmission of up to 3 audio sources
- Simple integration of classroom technology
- Power from computer USB or AC wall outlet
- Eliminates costly and time consuming wire runs for integration
- Compatible with all Lightspeed Infrared Classroom Audio Systems

The Infrared Connection to Classroom Multimedia

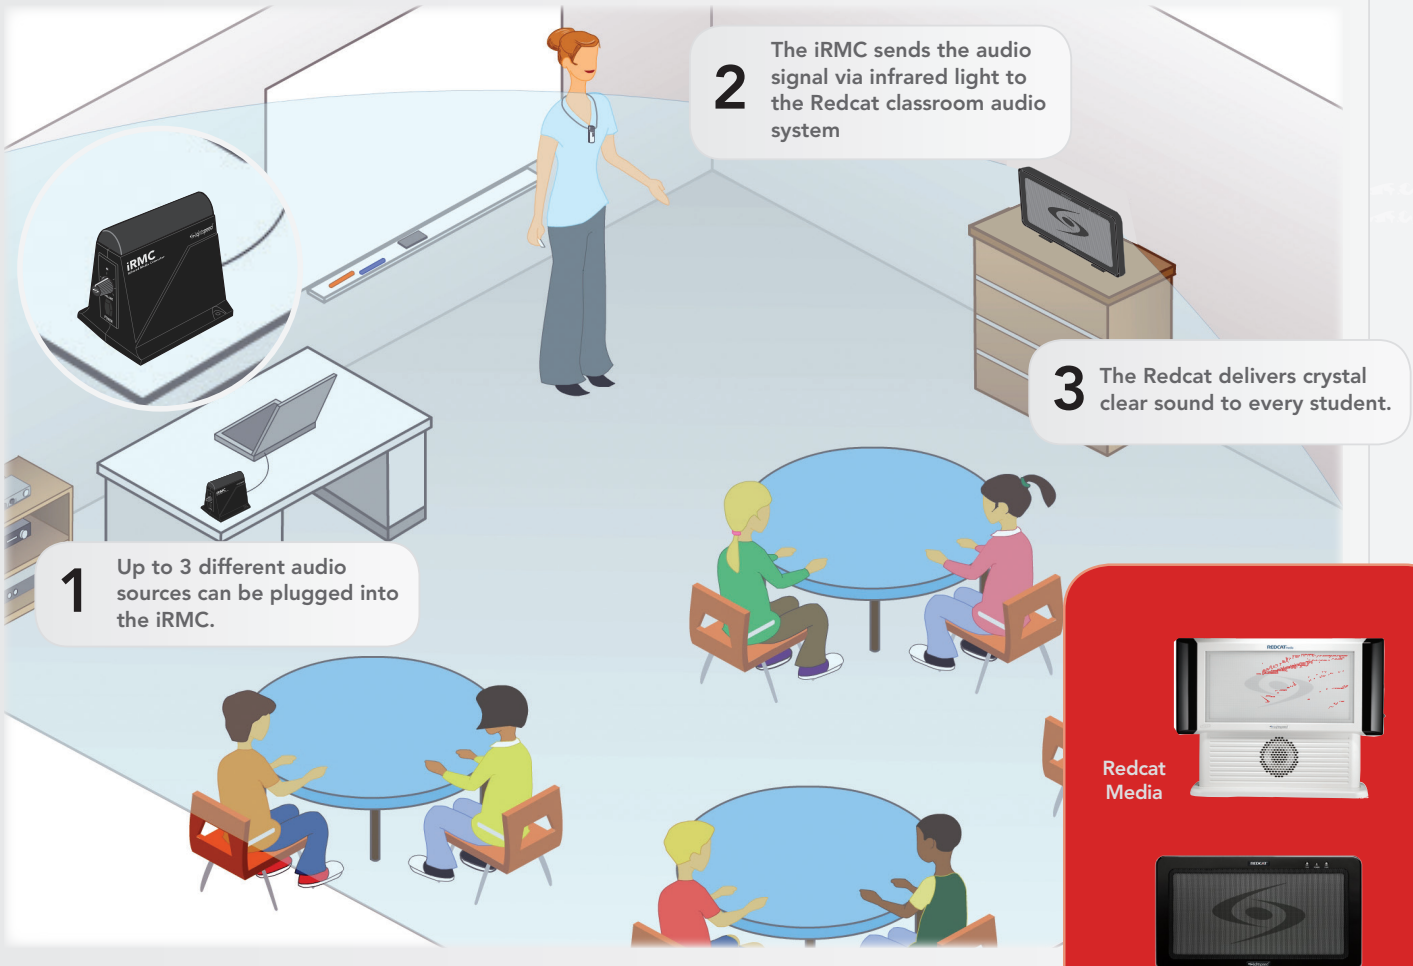

Multimedia Sound... Quick and Simple

The iRMC can be placed near classroom audio sources for a quick connect solution. Running wires and cables around the room is no longer necessary. Whatever multimedia sound source you choose will be heard clearly throughout the learning environment.



Redcat Media

Redcat

Cat 885

Cat 855

The Perfect Match

The iRMC Infrared Media Connector is designed to work flawlessly with all infrared classroom audio systems by Lightspeed Technologies.

Contact us:

LIGHTSPEED TECHNOLOGIES
11509 SW HERMAN ROAD / TUALATIN, OREGON 97062
TOLL FREE: 1.800.732.8999 / PHONE: 503.684.5538 / FAX: 503.684.3197
WWW.LIGHTSPEED-TEK.COM

