



# Topcat™ Instructional Audio System

## FIRST, ENSURE THE SYSTEM IS POWERED ON

When powered on, the white LED on the Topcat speaker panel will glow.

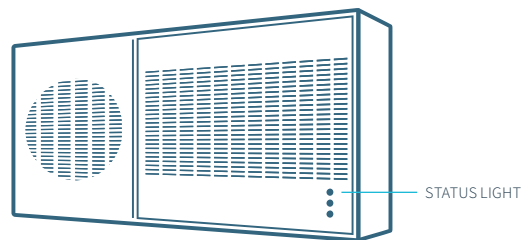


## USING THE FLEXMIKE




Remove microphone from charger. Press the mute button to unmute, hold near your mouth and begin speaking.


ALIGN WITH COLLARBONE



## USING THE SHAREMIKE



Remove microphone from charger and press the mute button to begin speaking.




## CHARGE MICROPHONES NIGHTLY

Place the microphones into the cradle charger. The power status light will glow red when it is charging.

When charging is complete, the power status light will glow green.

It takes about 5-6 hours to fully charge the microphone battery.

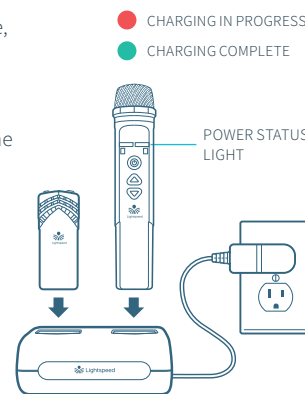


## PAIRING MICROPHONES TO TOPCAT



Your system is shipped with microphones and base units pre-paired for quick and easy use. If you ever need to pair new components, follow this pairing process:

### 1 POINT MICROPHONES AT TOPCAT

From a powered off state, point the IR transmitter lens toward the base unit (for ShareMike, the transmitter lens is located on the back of the microphone).

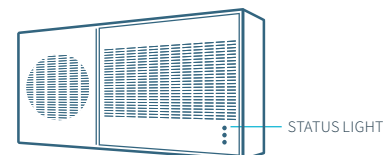


### 2 PRESS AND HOLD POWER BUTTON

Press and hold the power button for 5 seconds until the Mic 1 and Mic 2 lights start flashing, then release the button and let the pairing process finish.






### 3 CONFIRM STATUS

The status light on Topcat will light up indicating the pairing process is complete. The Mic 1 or Mic 2 light on the microphone will stay illuminated.

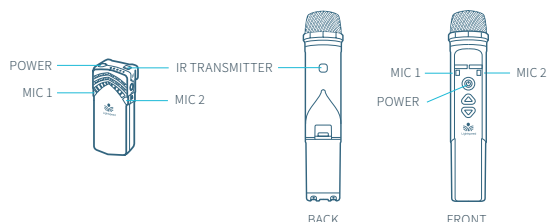

# Topcat with optional Media Connector

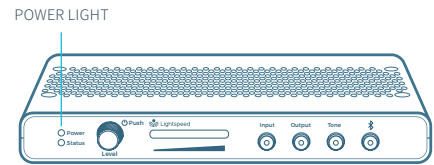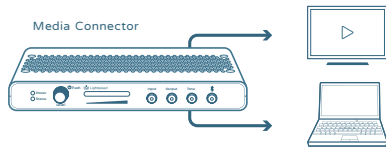

## 1 DETERMINE LOCATION

Media Connector is designed to be connected to the primary media source in the classroom, usually the computer or display panel.

## 2 CONNECT TO POWER

Connect the USB cable power cord to a computer, or use the USB power adapter to plug into wall outlet.  
Plug the USB cable into the USB input on the back of the Media Connector.

## 3 POWER ON

When powered on, the white LED on the front panel will glow.  
Topcat does not need to be powered off at the end of day, but if desired, you may power down Topcat by powering down the Media Connector.

## CONNECTING MEDIA CONNECTOR TO AUDIO


Audio can be connected using either a digital 2-way USB audio or analog audio.

### USB Audio

USB audio enables a 2-way audio link to:


Send audio **from the computer** to Topcat to ensure all audio can be played through the Topcat speaker.

Send audio **to the computer** from Topcat to ensure the teacher's Flexmike and any student microphones are clearly picked up by a video conferencing solution.




### COMPUTER SETTINGS

Once connected, open computer sound setting to select "Lightspeed Audio" as the microphone and speaker.

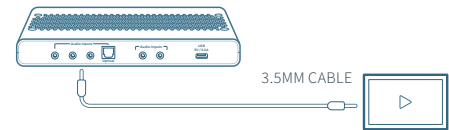

### Analog Audio

Plug your external audio equipment (e.g., video display) into one of the Audio input jacks.



Adjust the volume as needed by pressing the Audio Input selector and adjusting the level knob as needed.

## BLUETOOTH PAIRING TO CONNECT TO OTHER AUDIO SOURCES

### 1 SET UP YOUR OTHER AUDIO SOURCE


On your personal device, make sure your bluetooth setting is on and in the search mode.

### 2 PUT MEDIA CONNECTOR IN PAIRING MODE


Press and hold Bluetooth button for 3-5 seconds until status light starts blinking blue to be discovered by your personal device.

### 3 PAIR TO YOUR DEVICE

Locate LS\_MCT on your personal device and complete pairing process.

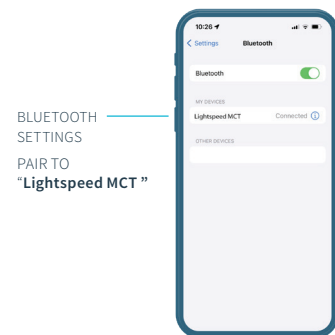

BLUETOOTH SETTINGS  
PAIR TO  
"Lightspeed MCT"



BLUETOOTH BUTTON



For complete operating instructions, go to [www.lightspeed-tek.com/topcat-usermanual](http://www.lightspeed-tek.com/topcat-usermanual) (or scan the 2D barcode).

QS0593US01-8



81-TCN-D