





# Pairing your Clearmike

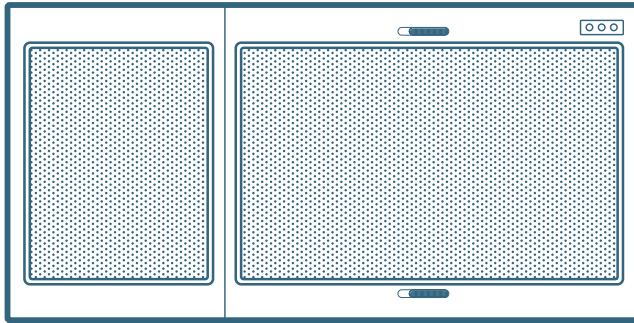

1

With the Clearmike powered off, point the IR transmitter lens toward the Topcat Cascadia.

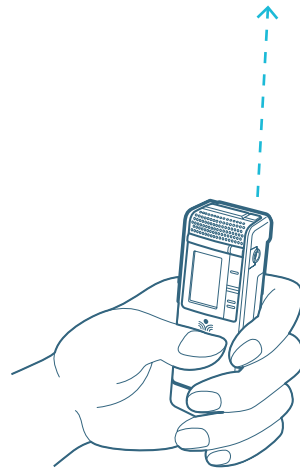

Your system is shipped with microphones and base units pre-paired for quick and easy use. If for any reason you need to pair new components, follow this pairing process:


**PLEASE NOTE:** All microphones must be out of the charger while pairing.

2

Press and hold the Power/Mute button for 5 seconds until the Talk/Mute light starts flashing blue and white. The Status light on the Topcat Cascadia will also start flashing blue and white.

3

When complete, the Status light on the Topcat Cascadia will turn blue, the Talk/Mute light on the microphone will be white, and the display on the microphone will say "Pair Success".

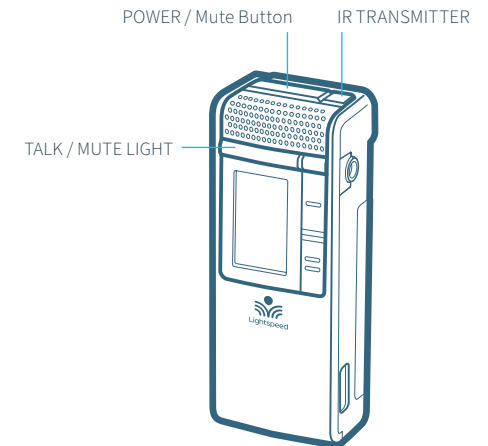





# Pairing your ShareMike



Your system is shipped with microphones and base units pre-paired for quick and easy use.

If for any reason you need to pair new components, follow this pairing process:

**PLEASE NOTE:** All microphones should be out of the charger while pairing.

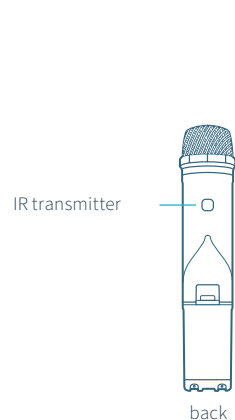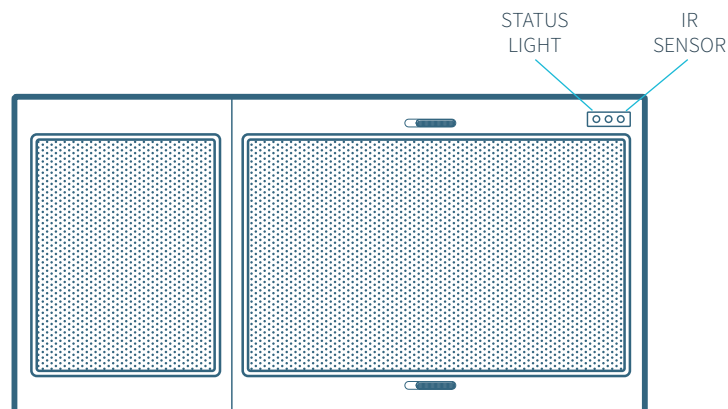


1

From a powered off state, point the IR transmitter lens, located on the back of the microphone, toward the C25.



2

Press and hold the power button for 5 seconds until the mic 1 and mic 2 lights start flashing, then release the button and let the pairing process finish.



3

The Status light on the base unit will light up indicating the pairing process is complete. The mic 1 or mic 2 light on the microphone will stay illuminated.