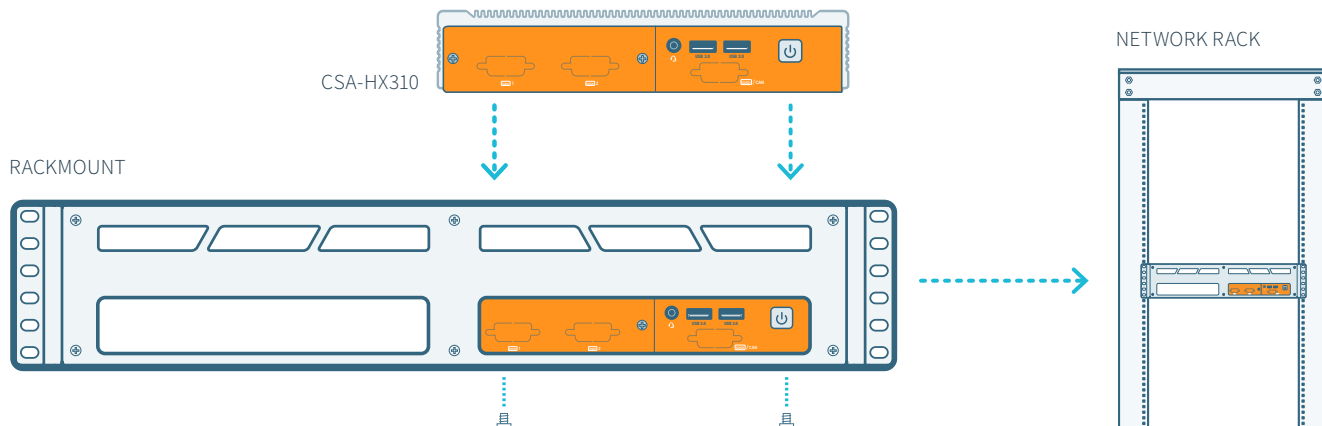# CSA-HX310

Cascadia Software Appliance

The CSA-HX310 is an appliance that is set up to run the Cascadia Web Console software that supports the Lightspeed Cascadia platform.
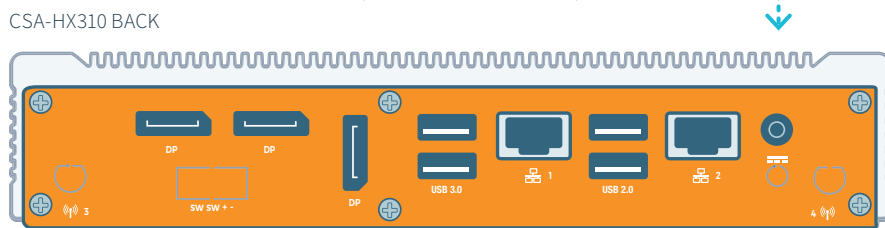
1 INSTALL THE CSA-HX310 INTO A NETWORK RACK

The CSA-HX310 comes preinstalled on a standard 2U rackmount adapter.

NETWORK RACK

CSA-HX310

RACKMOUNT

2 PLUG THE POWER SUPPLY INTO AN OUTLET AND THE BACK OF THE CSA-HX310

Use provided straps for cable management if necessary.
NOTE: The CSA-HX310 will automatically boot up when connected to power.

CSA-HX310 BACK

DP   DP
SW SW + -   DP
USB 3.0   1   USB 2.0   2
3   4

3 PLUG IN A CAT5E NETWORK CABLE

Port 1 on the back of the CSA-HX310.

MAC ADDRESS

MAC address of CSA-HX310 is on the label on the device bottom.

REMOVING FROM RACKMOUNT

The CSA-HX310 can be removed from the rackmount adapter to move it closer to power and network access. Rubber feet are provided to keep it stable on a flat surface.