


## 5 QBALL AWESOME FEATURES


### Quiet Toss

The Qball is a smart microphone that knows when it is being tossed and automatically mutes itself to avoid unwanted noise. Red means it's Muted, Green means Go.

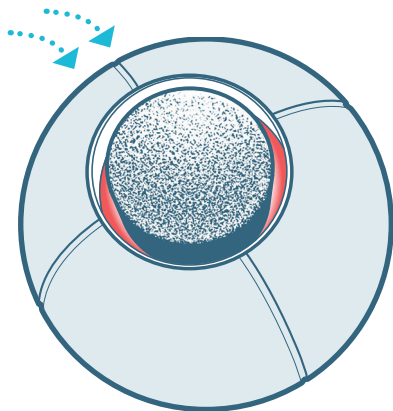


### Hush Mode

Done using the Qball for a bit? Simply flip the Qball upside down onto the windscreen and it will automatically mute itself.

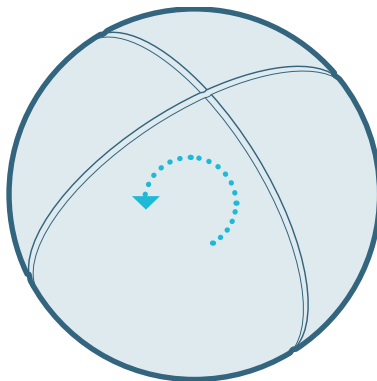

### AutoSleep

The Qball automatically goes into standby mode if no movement is detected for 15 minutes. The LED lights will turn Blue when asleep. To wake it back up just give it a shake.

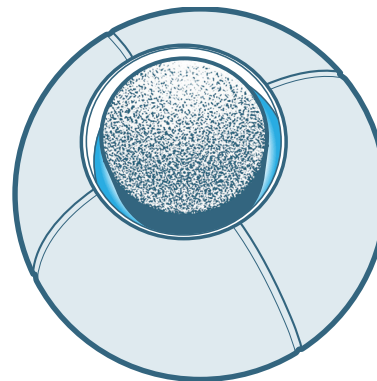

**NOTE** To activate the features above, you may need to change a setting on your microphone. For instructions, follow the QR code below.



#### WANT TO LEARN MORE?

To see a video on how to work with Lightspeed Qball, go to [www.lightspeed-tek.com/qball-video](http://www.lightspeed-tek.com/qball-video) (or scan the QR code) QS0729US01-3

# Lightspeed | Qball

Welcome to  
Lightspeed Qball.  
Let's get rolling!

- 1 **Pair the Clearmike/  
Flexmike to your  
Lightspeed system**
- 2 **Connect a Clearmike/  
Flexmike to your  
Lightspeed Qball**
- 3 **Power on the Qball  
and Clearmike/Flexmike**
- 4 **Charge the Qball  
and Clearmike/Flexmike**
- 5 **Qball awesome  
features**


## 1 PAIR THE CLEARMIKE/FLEXMIKE TO YOUR LIGHTSPEED SYSTEM

**NOTE** The pairing process is similar for all Lightspeed systems, including C25, Redcat, Topcat and T25.

### CLEARMIKE


**a**

With the Clearmike powered off, point the IR transmitter lens toward the C25.




**b**

Press and hold the Power/Mute button for 5 seconds until the Talk/Mute light starts flashing blue and white then release the button and let the pairing process finish.



**c**

When complete, the Status light on the C25 will turn blue, the Talk/Mute light on the microphone will be white, and the display on the microphone will say "Pair Success".

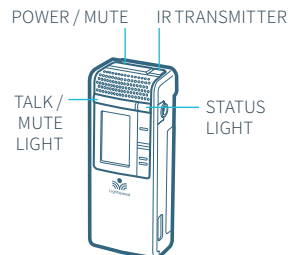

### FLEXMIKE


**a**

With the Flexmike powered off, point the IR transmitter lens toward the Lightspeed system.




**b**

Press and hold the Power/Mute button for 5 seconds until the Mic 1 and Mic 2 lights start flashing, then release the button and let the pairing process finish.



**c**

The status light on your Lightspeed system will glow indicating the pairing process is complete. The Mic 1 or Mic 2 light on the microphone will stay illuminated.


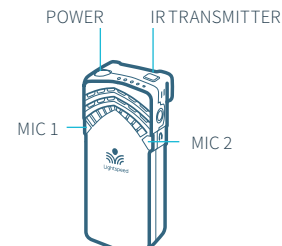


## Lightspeed | Qball


### 2 CONNECT A CLEARMIKE/FLEXMIKE TO YOUR LIGHTSPEED QBALL

Insert a Lightspeed teacher microphone to connect to the Lightspeed Instructional Audio system to your Qball.


Remove the black windscreen by twisting counter-clockwise and pulling up.

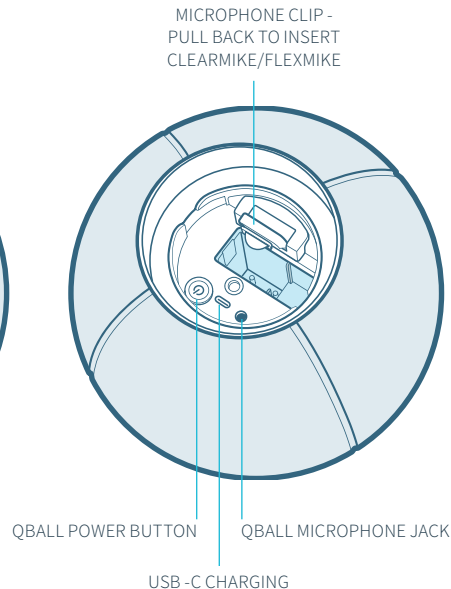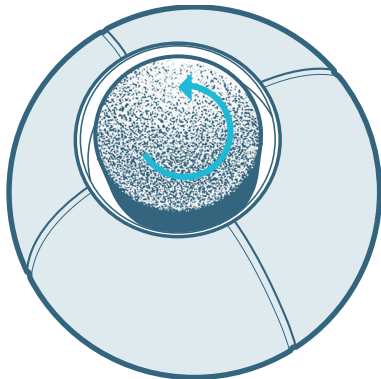

#### CLEARMIKE

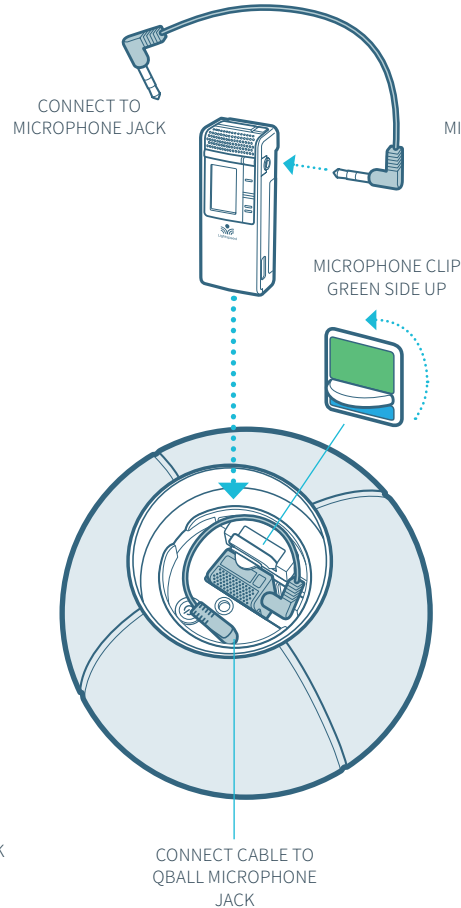


#### FLEXMIKE

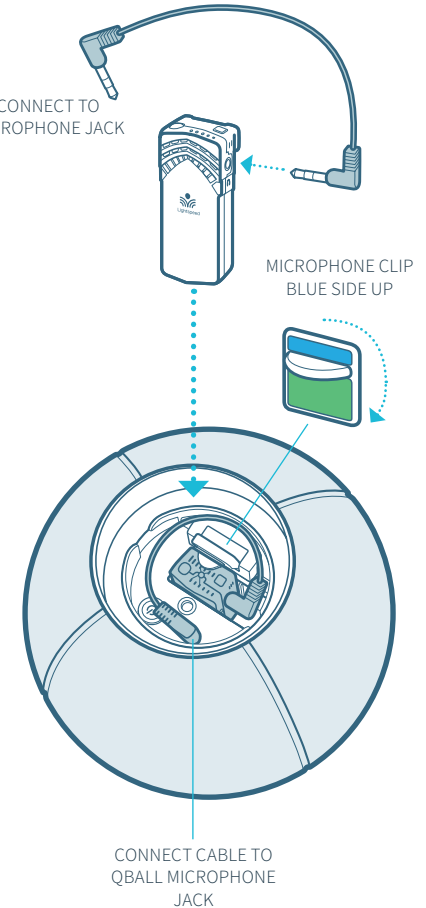

### 3 POWERING ON THE QBALL AND CLEARMIKE/FLEXMIKE

- a Press and hold the power button on the Qball until the LED light ring illuminates.
- b Turn on the Clearmike/Flexmike by pressing the power button for 1-2 seconds. The mic status light will turn solid white to indicate the microphone is ready for operation.
- c Tap the power button on the Flexmike/Clearmike to begin sharing through the audio system. The mic status light will turn blue to indicate the microphone is broadcasting.
- d Replace the black windscreen and secure it with a clockwise turn.

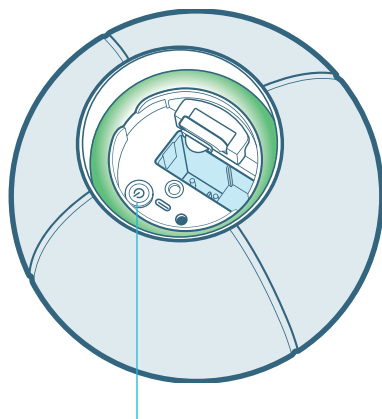

QBALL POWER BUTTON

### 4 CHARGING THE QBALL AND CLEARMIKE/FLEXMIKE

- a The Qball and Flexmike/Clearmike need to be charged nightly. On a full charge, it will operate throughout the school day.
- b To charge, remove the black windscreen. Removing the Clearmike/Flexmike is not necessary.
- c Plug the supplied USB wall charger into an electrical outlet and connect the USB-C end to the charging port on the Qball. This will simultaneously charge both the Qball and the Clearmike/Flexmike.
- d Your Qball will glow with individual red LED lights when it is charging. One light indicates low battery, four solid lights shows it is fully charged.

